

ARCHITECTURAL LIGHTING

Product Catalogue



ABOUT US

A structure, be it residential, commercial or industrial comes to life not just through the architectural marvel it carries, but with the exclusivity of the lighting that is used in it. It is thus obvious that any designer will agree to the fact that lighting is an essential factor in bringing life to a structure and never an afterthought like many of us consider it. Realising this significance of light across all verticals of life and business, and being aware of the revolutions that LED has brought into the world over the last few decades, we a group of enthusiastic professionals introduced EMERGEX in 2018 with a vision of delivering world class energy efficient and exclusively elegant designs of LED Lighting products.

VISION, MISSION & VALUES

VISION: To create a leading space by delivering prominent solutions to craft visually unique LED Lighting.

MISSION: To be a company with widespread market presence and client base across the globe offering tailor-made LED solutions ensuring the right light for the right use.

VALUES: Our Core Values are TRUST, INTEGRITY, EXCELLENCE, QUALITY AND SUSTAINABILITY.







OUR STORY

EMERGEX – Elegantly Excellent!

EMERGEX is committed to be a true partner for lighting designers, architects and landscape designers helping them to achieve their personal vision and their customer satisfaction. EMERGEX operates on the core focus of excellent performance at an affordable price. Technology these days costs a fortune and that makes room for a second thought inspite of being a responsible developer. That is where we make the exception. EMERGEX is continuously evolving as a result of compact Research & Development procedures happening at our Product Labs thus ensuring maximum productivity leaving minimum footprint on the environment. Efficient and Excellent performance is therefore backed by a sustainable way of doing it. And all these reaches you at the best possible competitive market rate.

Researches prove that the right light lifts the mood, inspires productivity and motivates us. It has major impact on your efficiency and even biological cycles. Lighting completely transforms a place, not just by brightening up the dark corners but by affecting your emotions. Using the light is not the end of it, using the right light is. EMERGEX questions the age old traditions and norms of using lights that goes well with the design, that looks good and that fits well into the structure. In contrary, EMERGEX brings in a wide range of products, catering to almost every requirement of LED Lights, complying with the health, aesthetics and energy efficiency factors of lighting.

INDOOR PRODUCT GUIDE

	Laser Blade	7		Track Lights	41
	J Series	12		MR16 Series	45
	M Series	15		Eco Series	48
	X Series	19		Profile Lights	50
	Pulse Spot Light	24		Pendant Lights	56
	Pixel Surface Series	26		LED Down Light	58
	Wall Washer	30		Backlit Panel Light	61
	Aqua Series	32		Cleanroom Lighting	63
	H Series	34		Strip Light	65
	D Series	36		SMPS	69
	Zoom Lights	38			

OUTDOOR PRODUCT GUIDE



Facade Lighting 71



Garden Lights 74



Underwater Lights 77



Wall Lights & Bulkheads 79



Bollards & Gate Lights 82



Post Top Lights 88



Step Lights 90



Street Lights 93



Flood Lights 95



Highbay & Wellglass 97

Architectural Interior Lighting

Indoor lighting is an often overlooked element of interior design. Learn how to boost your mood, health, and productivity with our interior lighting guide.

Precisely Crafted
Masterpiece



Laser Blade
Series





LASER BLADE S1



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

3W	44X44	35X35	46	30°
6W	74X44	65X35	46	30°
12W	146X44	137X35	46	30°
25W	281X44	271X35	46	30°
35W	415X44	405X35	46	30°

Reflector Options



Body Colour



Available CCT



LASER BLADE S1 PRO



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

2W	45X45	35x35	32	40°
4W	48X45	58X35	32	40°
6W	95X45	85X35	32	40°
10W	148X45	139X37	32	40°
20W	282X45	272X37	32	40°

Reflector Options



Body Colour



Available CCT



LASER BLADE S2



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

5W	51x51	41x41	55	38°
12W	128x50	118x42	55	38°
16W	90x90	80x80	55	38°
20W	205x50	195x42	55	38°
36W	130x130	120x120	55	38°
40W	395x52	385x42	55	38°

Reflector Options



Body Colour



Available CCT



*Dimensions in mm



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



LASER BLADE S3



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

12W	146x44	137x35	40	80°
20W	281x44	271x35	40	80°


Body Colour



Available CCT



CIRCULO LASER BLADE

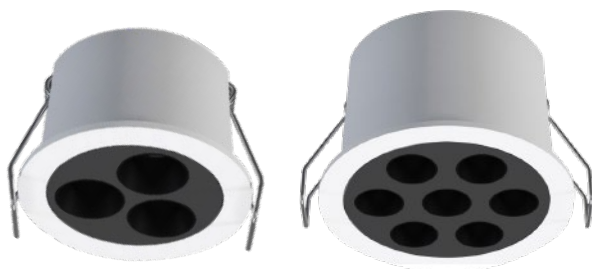

Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	60	50	35	30°
15W	85	75	50	30°


Body Colour



Available CCT



LASER BLADE ECO 1

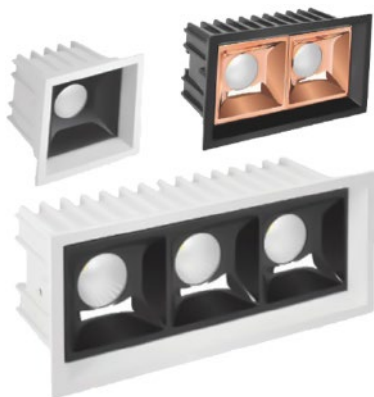

Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

1X6W	70X70	60X60	60	45°
2X6W	120X70	110X60	60	45°
3X6W	162X70	152X60	60	45°
1X8W	70X70	60X60	60	45°
2X8W	120X70	110X60	60	45°
3X8W	162X70	152X60	60	45°

Reflector Options



Body Colour



Available CCT



*Dimensions in mm



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



LASER BLADE ECO 2

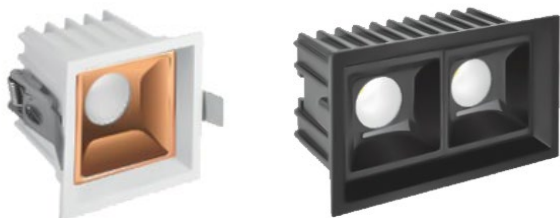

Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

1X12W	90X90	80x80	75	45°
1X15W	90X90	80X80	75	45°
2X12W	160X90	150X80	75	45°
2X15W	160X90	150X80	75	45°


Reflector Options



Body Colour



Available CCT



LASER BLADE MINI ROUND



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

6W	74X34	66x25	40	40°
8W	54X54	45X45	40	40°
12W	134X33	125X26	40	40°
18W	73X73	65X65	40	40°
24W	255X34	247X26	40	40°


Reflector Options



Body Colour



Available CCT



LASER BLADE MINI SQUARE



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

6W	74X34	66x25	40	40°
8W	54X54	45X45	40	40°
12W	134X33	125X26	40	40°
18W	73X73	65X65	40	40°
24W	255X34	247X26	40	40°

Reflector Options



Body Colour



Available CCT



*Dimensions in mm



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options





COB J Series

Multiple Finishes.
Infinite Possibilities..



J1 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	70	65	61	36°
12W	80	75	70	36°
18W	90	85	80	36°

Body Colour



Available CCT




J2 SPOT LIGHT




Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	70	65	63	24°
12W	80	75	72	36°
18W	90	85	86	36°

Body Colour



Available CCT



J3 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	70	65	63	24°
12W	80	75	72	36°
18W	90	85	86	36°

Body Colour



Available CCT



J4 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	70	65	43	24°/ 36°
12W	80	75	46	24°/ 36°
18W	90	85	54	24°/ 36°

Body Colour



Available CCT



*Dimensions in mm

UGR <16	CRI 90	PF >90	IP20	Indoor
------------	-----------	-----------	------	--------



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



J5 SPOT LIGHT

Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------




7W	70	65	43	24°
12W	80	75	46	36°
18W	90	85	54	36°

Body Colour



Available CCT



J6 SPOT LIGHT

Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------




7W	63	55	53	24°
12W	83	75	65	36°
18W	105	95	74	36°

Body Colour



Available CCT



J7 SPOT LIGHT

Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------



7W	75	70	60	24°
12W	85	80	70	38°
18W	100	95	72	38°

Body Colour



Available CCT



J8 SPOT LIGHT

Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------



7W	65	60	46	24°
12W	75	70	55	38°
18W	90	85	57	38°

Body Colour



Available CCT



*Dimensions in mm



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



emergex®





COB **M** Series

Designed to Blend.
Built to Shine.



M1 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	70	65	50	25°
12W	85	80	65	36°
15W	85	80	65	36°
18W	95	90	75	36°

Reflector Options



Body Colour



Available CCT



M2 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	70	60	38	24°
12W	82	75	40	36°
15W	82	75	40	36°
18W	95	85	50	36°

Body Colour



Available CCT



M3 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	55	50	95	24°
12W	75	70	100	36°
15W	90	80	125	36°
18W	90	80	125	36°

Body Colour



Available CCT



M4 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	65	54	60	15°/25°
----	----	----	----	---------

Body Colour



Available CCT



*Dimensions in mm



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



M5 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	60	55	42	25°
12W	80	75	50	38°
18W	100	95	62	38°

Body Colour



Available CCT



M6 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	60	55	75	38°
12W	70	65	75	38°
18W	83	78	85	38°

Body Colour



Available CCT



M7 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	62	55	83	38°
12W	72	65	95	38°
18W	82	75	100	38°

Body Colour



Available CCT



M8 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

6W	50	38	48	20°
----	----	----	----	-----

Body Colour



Available CCT



*Dimensions in mm


LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



emergex®



COB **X** Series

COB X Series

Experience the
new dimension of
Lighting.



X1 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	65	50	62	24°
12W	85	75	80	36°
15W	85	75	80	36°
18W	95	85	100	36°

Reflector Options
Body Colour
Available CCT

X2 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

7W	40	35	55	24°
12W	60	55	82	36°
18W	80	75	95	36°

Body Colour
Available CCT

X3 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

10W	70	60	65	25°
12W	80	70	75	38°
15W	80	70	75	38°
18W	95	85	88	38°

Body Colour
Available CCT

X4 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

5W	62	55	25	24°
9W	72	65	28	24°
12W	83	75	31	24°/36°
15W	105	95	35	24°/36°

Body Colour
Available CCT

*Dimensions in mm



LED Powered By
CREE |

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



X5 SPOT LIGHT




	Power	Outer	Cutout	Height	Beam angle
--	-------	-------	--------	--------	------------

ROUND	3W	46	36	38	30°
	7W	70	60	62	40°
	12W	85	75	74	15°/ 36°/45°
	15W	85	75	88	15°/ 36°/45°
	18W	95	81	93	15°/ 36°/45°
	30W	120	110	95	15°/ 36°/45°
	40W	140	127	110	45°
SQUARE	50W	185	170	127	60°
	7W	68	60	61	25°
	12W	85	75	73	38°
	15W	85	75	88	38°
	18W	95	68	81	38°

Body Colour



Available CCT



X6 SPOT LIGHT




	Power	Outer	Cutout	Height	Beam angle
--	-------	-------	--------	--------	------------

3W	50	32	24	30°
7W	70	60	60	40°
12W	85	75	65	15°/36°/45°
15W	85	75	80	15°/36°/45°
18W	95	85	82	15°/36°/45°
30W	120	110	95	45°

Body Colour



Available CCT



X7 SPOT LIGHT




	Power	Outer	Cutout	Height	Beam angle
--	-------	-------	--------	--------	------------

7W	70	62	70	25°
12W	85	75	85	38°
15W	85	75	100	38°

Body Colour



Available CCT



X8 SPOT LIGHT



	Power	Outer	Cutout	Height	Beam angle
--	-------	-------	--------	--------	------------

12W	90	80	95	36°
15W	90	80	110	36°

Body Colour



Available CCT



*Dimensions in mm


LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



X9 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
7W	63	54	45	25°
12W	70	60	53	38°
15W	75	65	64	38°
18W	75	65	64	38°
30W	105	90	75	45°
36W	125	110	80	45°

Body Colour



Available CCT



X10 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
ROUND				
3W	70	62	40	24°
6W	102	86	58	24°
10W/12W	102	86	70	36°
15W/20W	125	110	70	36°
30W	148	132	85	36°
40W	170	154	85	36°/60°
50W	170	154	85	36°/60°
SQUARE				
3W	62	55	40	24°
6W	102	86	58	24°
10W/12W	102	86	70	36°
15W/20W	125	110	70	36°
30W	148	132	85	36°
40W	170	154	85	36°/60°
50W	170	154	85	36°/60°

Body Colour



Available CCT



*Dimensions in mm



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options





Pulse Spot Light

Smart Design.
Easy Maintenance.



PULSE SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
7W	65	55	77	24 ⁰
9W	65	55	77	24 ⁰
12W	85	75	78	36 ⁰
15W	110	95	103	36 ⁰
18W	110	95	103	36 ⁰

Reflector Options



Body Colour



Available CCT



Front openable



*Dimensions in mm



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



Pixel COB

Surface



Smart & Bright.



PIXEL CYLINDER SURFACE



Power	Outer	Height	Beam angle
-------	-------	--------	------------

ROUND

7W	55	75	24°
12W	75	85	36°
15W	75	135	36°
18W	75	135	36°
30W	95	150	36°/60°

SQUARE

7W	55	75	24°
10W	75	95	36°
12W	75	95	36°
15W	75	95	36°

Reflector Options



Body Colour



Available CCT



PIXEL SHINE SURFACE




Power	Outer	Height	Beam angle
-------	-------	--------	------------

12W	70	90	36°
18W	85	100	36°

Body Colour



Available CCT




PIXEL ELEGANT SURFACE




Power	Outer	Height	Beam angle
-------	-------	--------	------------

7W	63	53	24°
12W	83	65	36°
18W	105	74	36°

Body Colour



Available CCT



PIXEL CURVE SURFACE



Power	Outer	Height	Beam angle
-------	-------	--------	------------

7W	70	70	36°
12W	70	70	36°

Body Colour



Available CCT



*Dimensions in mm



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



PIXEL SURFACE DIFFUSED



Power	Outer	Height	Beam angle
6W	55	60	90°
12W	75	75	90°
18W	95	75	90°

Body Colour



Available CCT



PIXEL SURFACE DIFFUSED PRO



Power	Outer	Height	Beam angle
7W	72	65	110°
12W	92	65	110°
18W	122	65	110°
24W	142	65	110°

Reflector Options



Body Colour



Available CCT



PIXEL 360° SURFACE



Power	Outer	Height	Beam angle
7W	60	77	24°
12W	73	90	38°
20W	87	106	38°

Body Colour



Available CCT



PIXEL POINTER SURFACE




Power	Outer	Height	Beam angle
-------	-------	--------	------------

12W	55	80	38°
-----	----	----	-----

Body Colour



Available CCT



*Dimensions in mm



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



PIXEL STANDARD



Black Texture



Orange Texture



Wooden Finish



*Available with hanging option



Power

Outer

Height

Beam angle

7W

50

105

24°

12W

60

150

40°

18W

60

150

40°

25W

80

150

40°

30W

80

180

40°/60°

40W

80

195

40°/60°

Body Colour



Available CCT



PIXEL LASER SURFACE



Power

Outer

Height

Beam angle

12W

148X45

32

38°


24W

280X45


32

38°

Body Colour



Available CCT



PIXEL GRILL SURFACE



Power

Outer

Height

Beam angle

7W

48

80

30°

12W

68

80

30°

Body Colour



Available CCT



PIXEL LONG SURFACE/HANGING



Power

Outer

Height

Beam angle

12W

55

300

24°

15W

75

300

38°


20W

75

300

38°

Body Colour



Available CCT



*Dimensions in mm

UGR
<16

CRI
90

PF
>90

IP20


LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options





Wall Washer

Smooth Wash
across the wall.



NEO WALL WASHER



Power	Outer	Cutout	Height
12W	85	75	70
20W	108	95	85

Body Colour



White

Available CCT



LASER BLADE WALL WASHER



Power	Outer	Cutout	Height
12W	146x44	137x35	40
20W	281x44	271x35	40

Body Colour



Black



White

Available CCT



DELIVER SMOOTH,
UNIFORM WALL
ILLUMINATION WITH
PRECISE LIGHT CONTROL.

*Dimensions in mm



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



Aqua

Water proof

Made for [Wet Spaces.](#)



AQUA SPOT LIGHT



*Also available with motion sensor

Power	Outer	Cutout	Height	IP	Beam angle
-------	-------	--------	--------	----	------------

12W	85	75	50	IP54	36°
18W	108	95	65	IP54	36°

Reflector Options



Body Colour



Available CCT



AQUA SURFACE



Power	Outer	Height	IP	Beam angle
-------	-------	--------	----	------------

7W	75	90	IP54	38°
12W	75	90	IP54	38°
15W	75	140	IP54	38°
18W	75	140	IP54	38°

Body Colour



Available CCT



AQUA STRICKER SURFACE



Power	Outer	Height	IP	Beam angle
-------	-------	--------	----	------------

5W(DOB)	57	15	IP54	40°
---------	----	----	------	-----

Body Colour



Available CCT



*Dimensions in mm



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options





COB **H** Series

Big Power.
Designed for Large Spaces.



H1 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

15W	105	95	88	36°
20W	105	95	88	36°
25W/30W	115	105	90	36°/60°
40W	120	110	105	36°/60°

Body Colour



Available CCT



H2 SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

15W	125	110	80	36°
20W	125	110	80	36°
25W	130	115	95	36°/60°
30W	130	115	95	36°/60°

Body Colour



Available CCT



*Dimensions in mm




LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



COB **D** Series

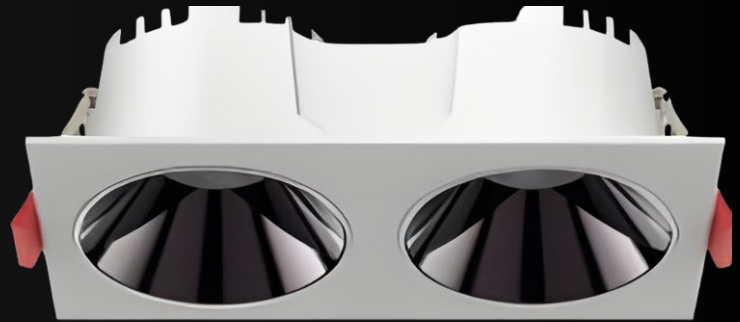

Dual Power for
Dynamic Spaces



D1 SPOT LIGHT

Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------



12W	120X120	103X103	78	36°
2X12W	120X220	103X195	78	36°/60°
3X12W	120X313	103X288	78	36°/60°
25W	135X135	125x125	100	36°/60°
30W	135X135	125x125	100	36°/60°
2x25W	135X260	125x238	100	36°/60°
2x30W	135X260	125x238	100	36°/60°

Body Colour



Available CCT



D2 SPOT LIGHT

Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------



25W	180X180	155x155	96	36°/60°
30W	180X180	155x155	96	36°/60°
2x25W	180X330	155x310	96	36°/60°
2x30W	180X330	155x310	96	36°/60°

Body Colour



Available CCT



D3 SPOT LIGHT

Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------



2x7W	134x70	120x55	50	38°
2x12W	169x85	155x75	62	38°

Reflector Options



Body Colour



Available CCT



*Dimensions in mm


LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



Zoom Light



Highlight the
Essential.



ZOOM LIGHT - LITE



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

10W	104	95	60	24°/36°
15W	104	95	60	24°/36°
20W	135	120	115	36°
25W	135	120	115	36°
30W	165	150	150	36°/60°
40W	165	150	150	36°/60°
50W	190	180	135	36°/60°

Body Colour



Available CCT



ZOOM LIGHT TWIN



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

2X25W	140x280	132x260	110	24°/36°
2X30W	140x280	132x260	110	24°/36°

Body Colour



Available CCT



SEMI RECESSED PIPE ZOOM LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

12W	90	80	95	24°
2x12W	112	90	100	24°

Body Colour



Available CCT



LONG PIPE ZOOM LIGHT



Power	Outer	Cutout	Pipe D+H	Beam angle
-------	-------	--------	----------	------------

6W	68	54	25x112	15°
9W	68	54	25x197	15°
12W	68	54	25x304	15°

Body Colour



Available CCT



*Dimensions in mm


LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options





Long Pipe
Zoom Light





Track Light

Highlight
the Essential.



MAXEVO TRACK LIGHT



2 Wire / 3 Wire / 4 Wire

Power Dia Height Beam angle

7W	50	135	24°
10W	50	135	24°
15W	60	150	36°
20W	60	150	36°
30W	80	180	36°/60°
40W	80	195	36°/60°
50W	100	190	60°

Body Colour



Available CCT



MAXEVO PLUS TRACK LIGHT



2 Wire / 3 Wire / 4 Wire

Power Dia Height Beam angle

12W	60	150	36°
18W	60	150	36°
25W	80	180	36°/60°
30W	80	180	36°/60°

Body Colour



Available CCT



MAXEVO LENS TRACK LIGHT



2 Wire

Power Dia Height Beam angle

7W	50	100	24°/38°
10W	50	100	24°/38°
15W	50	100	24°/38°

Body Colour



Available CCT



MAXEVO EX TRACK LIGHT



2 Wire / 3 Wire

Power Dia Height Beam angle

15W	110	125	24°/36°
20W	110	125	24°/36°
30W	125	140	36°/60°
40W	135	170	36°/60°


Body Colour



Available CCT



*Dimensions in mm



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



MAXEVO BRIGHT TRACK LIGHT



2 Wire / 3 Wire

Power	Dia	Height	Beam angle
-------	-----	--------	------------

15W	110	125	24°/36°
20W	110	125	24°/36°
30W	125	140	36°/60°
40W	135	170	36°/60°

Body Colour



Available CCT



MAXEVO 360° TRACK LIGHT




2 Wire / 3 Wire / 4 Wire

Power	Dia	Height	Beam angle
-------	-----	--------	------------

30W	80	185	36°/60°
40W	100	200	36°/60°

Body Colour



Available CCT



MAXEVO BOLD TRACK LIGHT



2 Wire / 3 Wire / 4 Wire

Power	Dia	Height	Beam angle
-------	-----	--------	------------

25W	80	125	36°/60°
30W	100	125	36°/60°

Body Colour



Available CCT



MAXEVO DROP TRACK LIGHT



2 Wire / 3 Wire / 4 Wire

Power	Dia	Height	Beam angle
-------	-----	--------	------------

20W	90	175	36°
30W	90	175	36°/60°
40W	90	200	36°/60°
50W	100	200	36°/60°

Body Colour



Available CCT



*Dimensions in mm


LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



MAXEVO SURFACE



Power	Dia	Height	Beam angle
-------	-----	--------	------------

10W	50	135	24°/40°
20W	60	150	24°/40°
30W	80	180	40°/60°
40W	80	195	40°/60°

Body Colour



Available CCT




MAXEVO SURFACE MINI



Power	Dia	Height	Beam angle
-------	-----	--------	------------

3W	30	75	24°
6W	35	80	24°
9W	45	95	24°

Body Colour



Available CCT



ACCESSORIES



1 Meter Track Channel
(WH/BL)

2 / 3 / 4 Wire



2 Meter Track Channel
(WH/BL)

2 / 3 / 4 Wire



I Type Track
Connector

2 / 3 / 4 Wire



L Type Track
Connector

2 / 3 / 4 Wire



T Type Track
Connector

2 / 3 / 4 Wire



X Type Track
Connecto

2 / 3 / 4 Wire

*Dimensions in mm



LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



MR16 Series



Modular Lighting.
Modular Home.



MR16 MODULAR



Power	Dia	Height	Beam angle
5W	48	60	24°
7W	48	60	24°
10W	48	65	36°/60°
12W	48	65	36°/60°
15W	48	65	36°/60°
20W	48	65	36°/60°

MR16 MODULAR PRO



Power	Dia	Height	Beam angle
5W	50	68	24°/38°
7W	50	68	24°/38°
10W	50	78	24°/38°
12W	50	78	24°/38°
15W	50	78	24°/38°
20W	50	78	24°/38°

MR16 HOUSING



NM - 101

Outer	Cutout
100X100X95	85X85



NM - 102

Outer	Cutout
190X100X95	160X85



NM - 103

Outer	Cutout
260X100X95	230X85

Available CCT



*Dimensions in mm

UGR <16	CRI 90	PF >90	IP20	Indoor	Specta Pro Anti Glare
------------	-----------	-----------	------	--------	---------------------------------

LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



MR16 HOUSING


NM - 201

Outer	Cutout
85X85	80


NM - 202

Outer	Cutout
80X80	70


NM - 203

Outer	Cutout
85	75


NM - 204

Outer	Cutout
78	75


NM - 205

Outer	Cutout
90	75


NM - 206

Outer	Cutout
95	75


NM - 207

Outer	Cutout
85X85	75X75


NM - 301

Outer	Cutout
110X110X40	90X90


NM - 302

Outer	Cutout
200X110X40	180X90


NM - 303


Outer	Cutout
90X90X25	70X70


NM - 304

Outer	Cutout
180X90X25	150X65


NM - 305

Outer	Cutout
255X90X25	230X70



*Dimensions in mm

UGR <16	CRI 90	PF >90	IP20	Indoor
------------	-----------	-----------	------	--------


LED Powered By
CREE | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



ECO COB Spotlight



Economically
Premium **Lighting.**



ECO XS SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

2W	35	28	20	30°
----	----	----	----	-----

Body Colour



Available CCT



ECO XL SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

3W	68x68	58x58	35	24°
6W	88x88	70x70	40	24°
10W/12W	105x105	85x85	55	36°
15W/20W(RD)	120	105	75	36°
25W/30W(RD)	145	135	90	36°/60°
40W/50W(RD)	160	145	100	36°/60°

Body Colour



Available CCT



ECO NEO SPOT LIGHT



Power	Outer	Cutout	Height	Beam angle
-------	-------	--------	--------	------------

20W/25W	140	120	90	45°/60°
30W	165	145	110	45°/60°
40W/50W	200	175	120	45°/60°

Body Colour



Available CCT



ECO XS SURFACE SPOT LIGHT



Power	Outer	Height	Beam angle
-------	-------	--------	------------

3W	65x65	30	30°
----	-------	----	-----

Body Colour



Available CCT



*Dimensions in mm


LED Powered By
EPISTAR |

Driver Powered By
PHILIPS | or EQUIVALENT

Smart Tunable And Dimmable Options



Linear Aluminium **Profile light**

Lighting
Re-invented



LINEAR ALUMINIUM PROFILE



LX - 0709 SF

Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 7mm, Height - 9mm

Light Source - 5mm LED Strip

Installation - Surface Mounted

Standard length - 2 Meters



LX - 0709 RS

Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 7mm, Height - 9mm

Light Source - 5mm LED Strip

Installation - Recess Mounted

Standard length - 2 Meters



LX - 1206 SF

Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 12mm, Height - 6mm

Light Source - 8mm LED Strip

Installation - Surface Mounted

Standard length - 2 Meters



LX - 1206 RS

Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 12mm, Height - 6mm

Light Source - 8mm LED Strip

Installation - Recess Mounted

Standard length - 2 Meters



LX - 1012 SF

Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 10mm, Height - 12mm

Light Source - 8mm LED Strip

Installation - Surface Mounted

Standard length - 2 Meters



LX - 1012 RS

Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 10mm, Height - 12mm

Light Source - 8mm LED Strip

Installation - Recess Mounted

Standard length - 2 Meters



LX - 1607 SF

Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 16mm, Height - 7mm

Light Source - 10mm LED Strip

Installation - Surface Mounted

Standard length - 2 Meters



LX - 1607 RS


Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 16mm, Height - 7mm

Light Source - 10mm LED Strip

Installation - Recess Mounted

Standard length - 2 Meters



LX - 1612 SF

Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 16mm, Height - 12mm

Light Source - 10mm LED Strip

Installation - Surface Mounted

Standard length - 3 Meters

LINEAR ALUMINIUM PROFILE



LX - 1612 RS

Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 16mm, Height - 12mm

Light Source - 10mm LED Strip

Installation - Recess Mounted

Standard length - 3 Meters



LX - 2309 SF

Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 23mm, Height - 9mm

Light Source - 10mm LED Strip

Installation - Surface Mounted

Standard length - 2 Meters



LX - 2309 RS

Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 23mm, Height - 9mm

Light Source - 10mm LED Strip

Installation - Recess Mounted

Standard length - 2 Meters



LX - 2512 SF

Diffuser - Frosted Polycarbonate

Width - 25mm, Height 12mm

Light Source - 10mm x 2 LED Strip

Installation - Surface Mounted

Standard length - 3.7 Meters



LX - 2512 RS

Diffuser - Frosted Polycarbonate

Width - 25mm, Height - 12mm

Light Source - 10mm x 2 LED Strip

Installation - Recess Mounted

Standard length - 3.7 Meters



LX - 2525 SF

Diffuser - Frosted Polycarbonate

Width - 25mm, Height - 25mm

Light Source - 10mm x 2 LED Strip

Installation - Surface Mounted

Standard length - 3 Meters



LX - 2525 RS

Diffuser - Frosted Polycarbonate

Width - 25mm, Height - 25mm

Light Source - 10mm x 2 LED Strip

Installation - Recess Mounted

Standard length - 3 Meters



LX - 3512 SF

Diffuser - Frosted Polycarbonate

Width - 35mm, Height - 12mm

Light Source - 10mm x 2 LED Strip

Installation - Surface Mounted

Standard length - 3.7 Meters



LX - 3512 RS

Diffuser - Frosted Polycarbonate


Width - 35mm, Height - 12mm

Light Source - 10mm x 2 LED Strip

Installation - Recess Mounted

Standard length - 3.7 Meters

LINEAR ALUMINIUM PROFILE



LX - 3535 SF

Diffuser - Frosted Polycarbonate
Width - 35mm, Height - 35mm
Light Source - 10mm x 2 LED Strip
Installation - Surface Mounted
Standard length - 3 Meters



LX - 3535 RS

Diffuser - Frosted Polycarbonate
Width - 35mm, Height - 35mm
Light Source - 10mm x 2 LED Strip
Installation - Recess Mounted
Standard length - 3 Meters



LX - 3232 SF

Diffuser - Frosted Polycarbonate
Width - 32mm, Height - 32mm
Light Source - 10mm x 2 LED Strip
Installation - Surface Mounted
Standard length - 3 Meters



LX - 3232 RS

Diffuser - Frosted Polycarbonate
Width - 32mm, Height - 32mm
Light Source - 10mm x 2 LED Strip
Installation - Recess Mounted
Standard length - 3 Meters



LX - 5012 SF

Diffuser - Frosted Polycarbonate
Width - 50mm, Height - 12mm
Light Source - 10mm x 3 LED Strip
Installation - Surface Mounted
Standard length - 3.7 Meters



LX - 5012 RS

Diffuser - Frosted Polycarbonate
Width - 50mm, Height - 12mm
Light Source - 10mm x 3 LED Strip
Installation - Recess Mounted
Standard length - 3.7 Meters



LX - 5035 SF

Diffuser - Frosted Polycarbonate
Width - 50mm, Height - 35mm
Light Source - 10mm x 3 LED Strip
Installation - Surface Mounted
Standard length - 3.7 Meters



LX - 5035 RS

Diffuser - Frosted Polycarbonate
Width - 50mm, Height - 35mm
Light Source - 10mm x 3 LED Strip
Installation - Recess Mounted
Standard length - 3.7 Meters



LX - 7535 SF


Diffuser - Frosted Polycarbonate
Width - 75mm, Height - 35mm
Light Source - 10mm x 3 LED Strip
Installation - Surface Mounted
Standard length - 3.7 Meters

LINEAR ALUMINIUM PROFILE



LX - 7535 RS

Diffuser - Frosted Polycarbonate
Width - 75mm, Height - 35mm
Light Source - 10mm x 3 LED Strip
Installation - Recess Mounted
Standard length - 3.7 Meters



LX - 10035 RS

Diffuser - Frosted Polycarbonate
Width - 100mm, Height - 35mm
Light Source - 10mm x 4 LED Strip
Installation - Recess Mounted
Standard length - 3.7 Meters



LX - 1616 Corner

Diffuser - Clear/Opal/Frosted Polycarbonate
Width - 16mm, Height - 16mm
Light Source - 8mm LED Strip
Installation - Corner Mounted
Standard length - 2 Meters



LX - 1818 Corner

Diffuser - Clear/Opal/Frosted Polycarbonate
Width - 18mm, Height - 18mm
Light Source - 10mm LED Strip
Installation - Corner Mounted
Standard length - 3 Meters



LX - 16R

Diffuser - Clear/Opal/Frosted Polycarbonate
Dia - 16mm
Light Source - 8mm LED Strip
Installation - Hanging/Wall Mounted
Standard length - 2 Meters



LX - 20R


Diffuser - Clear/Opal/Frosted Polycarbonate
Dia - 20mm
Light Source - 10mm LED Strip
Installation - Hanging/Wall Mounted
Standard length - 3 Meters



LX - Indoor Wall Washer Profile

Diffuser - Frosted Polycarbonate
Outer - 50mm, Cutout - 41mm
Light Source: 10mm LED Strip
Installation: Recess Mounted
Standard length - 0.5/1/2 Meters


TRIMLESS ALUMINIUM PROFILE



LX - 1214 Flat Pop

Diffuser - Clear/Opal/Frosted Polycarbonate


Width - 12mm, Height - 14mm
Light Source - 8mm LED Strip
Installation - Flat Pop Mounted
Standard length - 3.6 Meters



LX - 1214 Corner In Pop

Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 12mm, Height - 14mm
Light Source - 8mm LED Strip
Installation - Corner In Mounted
Standard length - 3.6 Meters



LX - 1214 Corner Out Pop

Diffuser - Clear/Opal/Frosted Polycarbonate

Width - 12mm, Height - 14mm
Light Source - 8mm LED Strip
Installation - Corner Out Mounted
Standard length - 3.6 Meters



LX - 2525 Pop

Diffuser - Frosted Polycarbonate

Width - 25mm, Height - 25mm
Light Source - 10mm x 2 LED Strip
Installation - Pop Mounted
Standard length - 3.6 Meters



LX - 3535 Pop

Diffuser - Frosted Polycarbonate

Width - 35mm, Height - 35mm
Light Source - 10mm x 2 LED Strip
Installation - Pop Mounted
Standard length - 3.6 Meters




LX - 5035 Pop

Diffuser - Frosted Polycarbonate

Width - 50mm, Height - 35mm
Light Source - 10mm x 3 LED Strip
Installation - Pop Mounted
Standard length - 3.6 Meters

HANGING ALUMINIUM PROFILE



LX - 5070 Hanging

Diffuser - Frosted Polycarbonate


Width - 50mm, Height - 70mm
Light Source - Rigid MCPCB
Installation - Hanging Mounted
Standard length - 4/6/8/10/12 Feet




LX - 3270 Hanging

Diffuser - Frosted Polycarbonate

Width - 32mm, Height - 70mm
Light Source - Rigid MCPCB
Installation - Hanging Mounted
Standard length - 4/6/8/10/12 Feet

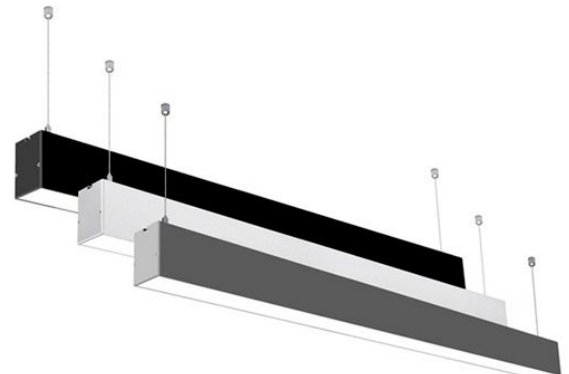

Modulo Pendant light

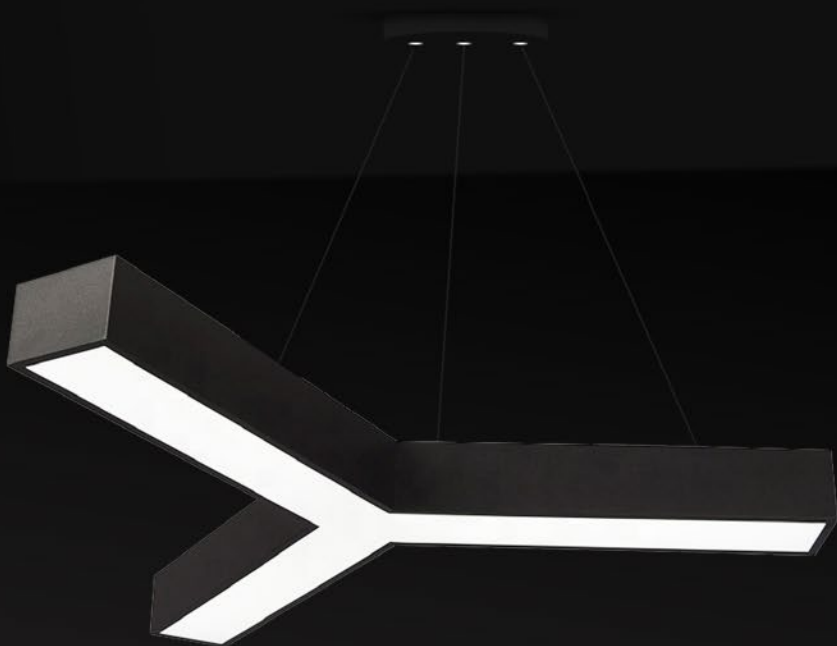

Smart lighting.
Smart ideas.



MODULO SURFACE/PENDANT LIGHT



**SQUARE MODULO
SURFACE/PENDANT LIGHT**

Power	Fixture size
40W	300X300
80W	600X600
120W	1200X1200
240W	1800X1800




**RECTANGULAR MODULO
SURFACE/PENDANT LIGHT**

Power	Fixture size
60W	600X300
90W	900X450
120W	1200X600
150W	1500X750




**'Y' SHAPED MODULO
SURFACE/PENDANT LIGHT**

Power	Fixture size
30W	300X300X300
60W	600X650X650
90W	900X900X900
120W	1200X1200X1200

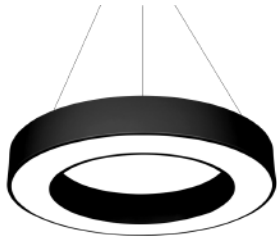


**CIRCULAR MODULO
SURFACE/PENDANT LIGHT**

Power	Fixture size
30W	300
36W	450
40W	600
80W	900

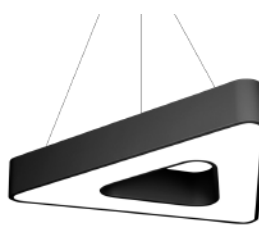

**TRIANGULAR MODULO
SURFACE/PENDANT LIGHT**

Power	Fixture size
30W	300
45W	450
60W	600
90W	900

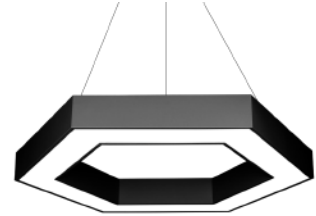


**HEXA MODULO
SURFACE/PENDANT LIGHT**

Power	Fixture size
30W	300
45W	450
60W	600
90W	900




**CIRCULAR DRUM MODULO
SURFACE/PENDANT LIGHT**

Power	Fixture size
30W	300
36W	450
40W	600
80W	900

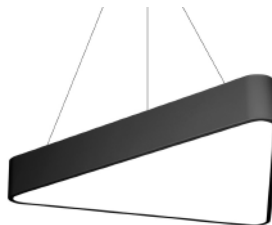

**TRIANGULAR DRUM MODULO
SURFACE/PENDANT LIGHT**

Power	Fixture size
30W	300
36W	450
40W	600
80W	900

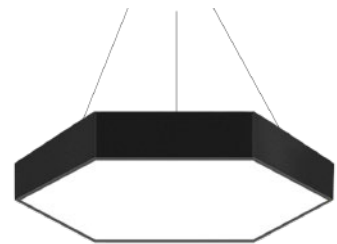

**HEXA DRUM MODULO
SURFACE/PENDANT LIGHT**

Power	Fixture size
30W	300
36W	450
40W	600
80W	900

Body Colour
Black White

Available CCT
WW NW CW

*Dimensions in mm



LED Powered By
OSRAM | **bridgelux**

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Smart Tunable And Dimmable Options



Create Your
Own Space.



LED Panel light
&
Down light



CRIZTA DEEP DOWNLIGHT




Power	Outer	Cutout	Height	IP	Beam angle
-------	-------	--------	--------	----	------------

12W	110	100	50	IP20	120°
18W	155	145	50	IP20	120°
24W	175	165	58	IP20	120°

Body Colour



Available CCT



ELEGANT DOWN LIGHT



Power	Outer	Cutout	Height	IP	Beam angle
-------	-------	--------	--------	----	------------

6W	80	72	45	IP20	120°
12W	90	82	50	IP20	120°
18W	100	92	55	IP20	120°

Body Colour



Available CCT



DIMBER DOWN LIGHT



Power	Outer	Cutout	Height	IP	Beam angle
-------	-------	--------	--------	----	------------

7W	80	75	50	IP20	120°
12W	100	95	50	IP20	120°
18W	130	125	50	IP20	120°
24W	150	145	50	IP20	120°

Reflector Options



Body Colour



Available CCT



SLIMLINE T5 BATTEN



Type	Power	Material	Length	IP	Beam angle
------	-------	----------	--------	----	------------

2 Feet	10W	PC	590	IP20	160°
4 Feet	20W	PC	1180	IP20	160°
4 Feet	36W	Aluminium	1180	IP20	160°

Available CCT



*Dimensions in mm


LED Powered By
EPISTAR |

Driver Powered By
PHILIPS | or EQUIVALENT

Smart Tunable And Dimmable Options



PRACTO SLIM PANEL



Power	Outer	Cutout	IP	Beam angle
3W	82x82	70X70	IP20	120°
6W	110x110	95X95	IP20	120°
9W	120x120	100X100	IP20	120°
12W	150x150	130X130	IP20	120°
15W	175x175	150X150	IP20	120°
18W	200x200	175x175	IP20	120°
22W	225x225	200x200	IP20	120°
24W (1x1)	300x300	275x275	IP20	120°

Body Colour



Available CCT



PRACTO SURFACE PANEL



Power	Outer	Height	IP	Beam angle
6W	95x95	35	IP20	120°
9W	120x120	35	IP20	120°
12W	150x150	35	IP20	120°
15W	175x175	35	IP20	120°
18W	225x225	35	IP20	120°
22W	225x225	35	IP20	120°
24W (1x1)	300x300	50	IP20	120°

Body Colour



Available CCT



PRACTO RIMLESS PANEL



- PC Housing

Power	Outer	Cutout	IP	Beam angle
8W	105x105	95x95	IP20	120°
12W	150x150	135x135	IP20	120°
18W	170x170	150x150	IP20	120°
22W	200x200	185x185	IP20	120°

Body Colour



Available CCT



PRACTO RIMLESS SURFACE PANEL



Power	Outer	Height	IP	Beam angle
15W	120x120	42	IP20	120°
24W	170x170	42	IP20	120°

Body Colour



Available CCT



*Dimensions in mm


LED Powered By
EPISTAR |


Driver Powered By
PHILIPS | *FULHAM* or EQUIVALENT

Smart Tunable And Dimmable Options



Backlit Panel Light

Office Series

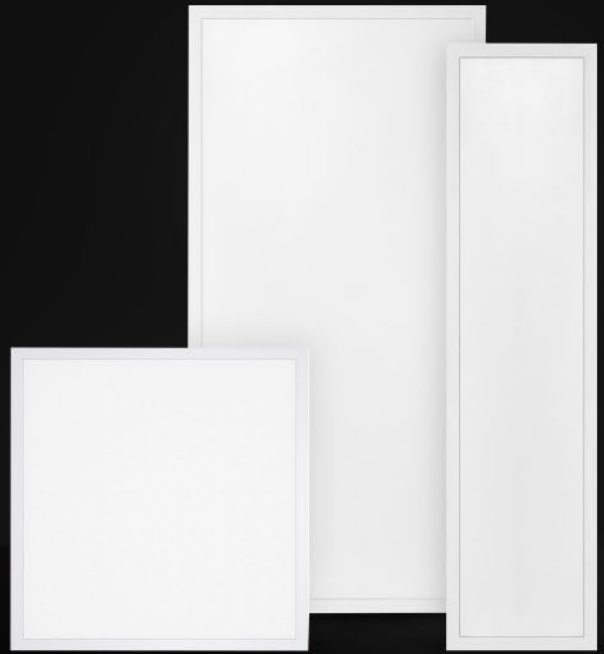

Better Vision
Better Productivity.



BLPL STANDARD



Power	Outer	Cutout	Height	IP	Beam angle
36W 2x2	595x595	575x575	65	IP20	120°
48W 2x2	595x595	575x575	65	IP20	120°
60W 2x2	595x595	575x575	65	IP20	120°
80W 2x2	595x595	575x575	65	IP20	120°
36W 1x4	295x1195	275x1175	65	IP20	120°
48W 1x4	295x1195	275x1175	65	IP20	120°
36W 1x2	295x595	275x575	65	IP20	120°
100W 2x4	595x1195	575x1175	65	IP20	120°
100W 4x4	1195x1195	1175x1175	65	IP20	120°

Available CCT



BLPL ECO SLIM



Power	Outer	Cutout	Height	IP	Beam angle
36W 2x2	595x595	575x575	40	IP20	120°
48W 2x2	595x595	575x575	40	IP20	120°

Available CCT



*Dimensions in mm



LED Powered By
OSRAM | *bridgelux*

Driver Powered By
PHILIPS | *FULHAM* or *EQUIVALENT*

Cleanroom Lighting



Hygienic &
Efficient.



TOP OPENING CLEANROOM LIGHT



CRCA Body



CRCA Body with SS frame

- Clean room fittings available with glass on request

Power	Outer	Cutout	Height	IP	Beam angle
-------	-------	--------	--------	----	------------

25W 1x1	300x300	275x275	65	IP54	120°
36W 2x2	595x595	565x565	65	IP54	120°
48W 2x2	595x595	565x565	65	IP54	120°
60W 2x2	595x595	565x565	65	IP54	120°
80W 2x2	595x595	565x565	65	IP54	120°

Available CCT



BOTTOM OPENING CLEANROOM LIGHT

Power	Outer	Cutout	Height	IP	Beam angle
-------	-------	--------	--------	----	------------

25W 1x1	300x300	275x275	65	IP54	120°
36W 2x2	595x595	565x565	65	IP54	120°
48W 2x2	595x595	565x565	65	IP54	120°
60W 2x2	595x595	565x565	65	IP54	120°
80W 2x2	595x595	565x565	65	IP54	120°

Available CCT



- Clean room fittings available with glass on request

*Dimensions in mm

CRI 90	PF >90	IP54	Indoor
-----------	-----------	------	--------

LED Powered By
OSRAM |

Driver Powered By
PHILIPS | **FULHAM** or **EQUIVALENT**

Strip light & Neon flex

Feel it.

Play with it.



SMD 2835



Model	Power	Voltage	PCB Width	Chip Size	LED QTY	IP
NCL-2835-60	6W/M	12V/24V DC	8mm	2835 SMD	60 LED/M	IP20
NCL-2835-120	12W/M	12V/24V DC	5mm/8mm	2835 SMD	120 LED/M	IP20
NCL-2835-180	18W/M	12V/24V DC	10mm	2835 SMD	180 LED/M	IP20
NCL-2835-240	24W/M	12V/24V DC	10mm	2835 SMD	240 LED/M	IP20

CRI>80

SDCM<3

120°

5M



- 90CRI available on request

SMD 2835 - 3 in 1



Model	Power	Voltage	PCB Width	Chip Size	LED QTY	IP
NCLT-2835-180	15W/M	12V/24V DC	10mm	2835 SMD	180 LED/M	IP20



CRI>80

SDCM<3

120°

5M



- 90CRI available on request

(RF Remote & controller)

*Wifi and Bluetooth controller options available on request.

SMD 2835 - WATER PROOF



Model	Power	Voltage	PCB Width	Chip Size	LED QTY	IP
NCLW-2835-60	6W/M	12V/24V DC	8mm	2835 SMD	60 LED/M	IP54
NCLW-2835-120	12W/M	12V/24V DC	5mm/8mm	2835 SMD	120 LED/M	IP54
NCLW-2835-180	18W/M	12V/24V DC	10mm	2835 SMD	180 LED/M	IP54
NCLW-2835-240	24W/M	12V/24V DC	10mm	2835 SMD	240 LED/M	IP54

CRI>80

SDCM<3

120°

5M



- 90CRI available on request

SMD 5050



Model	Power	Voltage	PCB Width	Chip Size	LED QTY	IP
NCL-5050-60	14W/M	12V/24V DC	10mm	5050 SMD	60 LED/M	IP20

CRI>80

SDCM<3

120°

5M



- 90CRI available on request

SMD 5050 - RGB



- 90CRI available on request

Model	Power	Voltage	PCB Width	Chip Size	LED QTY	IP
NCLRGB-5050-60	12W/M	12V/24V DC	10mm	5050 SMD	60 LED/M	IP20
NCLRGBWW-5050-60	12W/M	24V DC	10mm	5050 SMD	60 LED/M	IP20
NCLRGBWH-5050-60	12W/M	24V DC	10mm	5050 SMD	60 LED/M	IP20
NCLRBCCT-5050-60	12W/M	24V DC	10mm	5050 SMD	60 LED/M	IP20



(RF Remote & controller)

CRI>80 SDCM<3 120° 5M



*Wifi and Bluetooth controller options available on request.

ZERO DOT COB STRIP



Model	Power	Voltage	PCB Width	LED QTY	IP
NCL-COB	10W/M	12V/24V DC	10mm	400 LED/M	IP20

CRI>90 SDCM<3 120° 5M



SMD 2835 - ROPE LIGHT



Model	Power	Voltage	PCB Width	Chip size	LED QTY	IP
NCLR-2835-120	6.5W/M	220V AC	10mm	2835 SMD	120 LED/M	IP65

CRI>80 SDCM<3 120° 50M



NEON FLEX





Model	Power	Voltage	Width	Height	IP
NFX NEON 1208	8W/M	220V AC	12	08	IP65




(Plug - in cord)





NEON FLEX PRO HOUSING - IP66




T1010
Top View
10x10mm
PCB Width - 5mm




T1212
Top View
12x12mm
PCB Width - 8mm





T1616
Top View
16x16mm
PCB Width - 10mm





T2014
Top View
20x14mm
PCB Width - 10mm




T2030
Top View
20x30mm
PCB Width - 8mm x 2




T1315
Top View
13x15mm
PCB Width - 8mm




S410
Side View
4x10mm
PCB Width - 5mm




S612
Side View
6x12mm
PCB Width - 8mm



S1220
Side View
12x20mm
PCB Width - 10mm



R22
Side View
22mm
PCB Width - 5mm x 2



ULTRA SLIM SMPS


Power	Output Voltage	Output Current	Dimensions
24W	12V	2A	170x53x18
60W	12V/24V	5A/2.5A	170x53x18
100W	12V/24V	8.3A/4.1A	226x53x18
120W	12V/24V	10A/5A	226x53x18
150W	12V/24V	12.5A/6.3A	250x53x22
200W	12V/24V	16.6A/8.3A	308x53x22
250W	12V/24V	20A/10A	308x53x22
300W	12V/24V	25A/12.5A	308x53x22
360W	12V/24V	30A/15A	388x53x22
400W	12V/24V	33A/16.6A	388x53x22

SLIM PRO SMPS


Power	Output Voltage	Output Current	Dimensions
36W	12V/24V	3A/1.5A	85x58x34
60W	12V/24V	5A/2.5A	126x46x34
100W	12V/24V/48V	8.3A/4.1A/2.1A	187x46x34
150W	12V/24V/48V	12.5A/6.3A/3.1A	213x60x40
200W	12V/24V/48V	16.6A/8.3A/4.1A	223x68x40
250W	12V/24V	20.8A/10.4A	223x68x40
300W	12V/24V	25A/12.5A	223x68x40
350W	12V/24V	29.1A/14.5A	223x68x40
400W	12V/24V	33A/16.6A	223x68x40

DIMMABLE SMPS


Power	Output Voltage	Output Current	Dimensions
60W	12V/24V	5A/2.5A	145x48x29
100W	12V/24V	8.3A/4.2A	160x48x29
150W	12V/24V	12.5A/6.3A	180x63x29
200W	12V/24V	16.6A/8.3A	205x63x29
250W	12V/24V	20.8A/10.4A	205x63x29
300W	12V/24V	25A/12.5A	205x63x29

IP67 WATERPROOF SMPS


Power	Output Voltage	Output Current	Dimensions
60W	12V/24V	5A/2.5A	180x35x24
100W	12V/24V	8.3A/4.2A	160x63x19
150W	12V/24V	12.5A/6.3A	180x58x32
200W	12V/24V	16.7A/8.5A	210x58x32
300W	12V/24V	25A/12.5A	200x72x32

Architectural Exterior Lighting

Exterior lighting brings façades and outdoor spaces to life. Whether utilizing fixtures for security, landscape or dramatic effect, exterior lights can transform how you see and understand a building or pathway.

emergex®



Facade Lighting

Showcase Your
Architectural Marvel.

Facade Lighting



LINEAR WALLWASHER



Outdoor linear wall washer


(Available with antiglare baffle on request)

Type	Power	Length	IP	Beam angle
0.5 M	12W	500	IP66	10°/15°/24°/30°
0.5 M	18W	500	IP66	10°/15°/24°/30°
1 M	24W	1000	IP66	10°/15°/24°/30°
1 M	36W	1000	IP66	10°/15°/24°/30°
1.2 M	48W	1200	IP66	10°/15°/24°/30°

- DMX512 controller options available on request



PILLAR HIGHLIGHTER

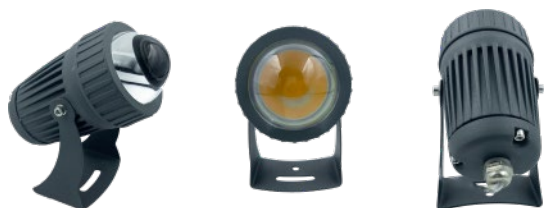

Power	Outer	Height	IP	Beam angle
8W	70	130	IP66	10°
12W	70	130	IP66	10°



FACADE LIGHT



24W Facade RD

Fixture size	IP	Beam angle
130x100x175mm	IP66	15°



36W Facade RD

Fixture size	IP	Beam angle
230x110mm	IP66	15°/24°/36°/60°



50W Facade RD

Fixture size	IP	Beam angle
290x235mm	IP66	15°/24°/36°/60°



100W Facade RD

Fixture size	IP	Beam angle
290x235mm	IP66	15°/24°/36°/60°



24W Facade SQ

Fixture size	IP	Beam angle
135x135x180mm	IP66	15°



50W Facade SQ

Fixture size	IP	Beam angle
295x240x70mm	IP66	15°/24°/36°/60°



- DMX512 controller options available on request

*Dimensions in mm



LED Powered By

OSRAM | CREE

Driver Powered By

PHILIPS | FULHAM or EQUIVALENT

Garden Lights

Follow
Your Light.



SPIKE LIGHT



Power	Outer	Height	IP	Beam angle
-------	-------	--------	----	------------

6W	62	72	IP66	24°/36°
9W	62	72	IP66	24°/36°
12W	75	100	IP66	24°/36°
15W	75	100	IP66	24°/36°
18W	75	100	IP66	24°/36°

Available CCT



SPIKE LIGHT PRO



Power	Outer	Height	IP	Beam angle
-------	-------	--------	----	------------

6W	72	100	IP66	24°/36°
9W	72	100	IP66	24°/36°
12W	80	120	IP66	24°/36°
15W	80	120	IP66	24°/36°
18W	80	120	IP66	24°/36°

Available CCT



SPIKE LIGHT TRIO



Power	Outer	Height	IP	Beam angle
-------	-------	--------	----	------------

6W	45	75	IP66	24°/36°
9W	60	100	IP66	24°/36°
12W	60	100	IP66	24°/36°

Available CCT



GARDEN HIGHLIGHTER



Power	Outer	Height	IP	Beam angle
-------	-------	--------	----	------------

4W	65x75	100	IP66	15°/25°
7W	55x66	72	IP66	15°

Available CCT



*Dimensions in mm



LED Powered By

CREE |

Driver Powered By

PHILIPS | **FULHAM** or **EQUIVALENT**

PATHWAY LIGHT



Type	Power	Outer	Cutout	Height	IP	Beam angle
1 Way	1W	85	70	70	IP67	105°
2 Way	2X1W	85	70	70	IP67	105°
4 Way	4X1W	85	70	70	IP67	105°

Available CCT



FAB INGROUND LIGHT



Power	Outer	Cutout	Height	IP	Beam angle
1W	43	34	70	IP67	24°
3W	70	55	85	IP67	24°
6W	70	55	85	IP67	38°
9W	100	75	85	IP67	38°
12W	100	75	85	IP67	38°

Available CCT



JOY INGROUND LIGHT




Power	Outer	Cutout	Height	IP	Beam angle
1W	43	34	45	IP67	45°
3W	85	75	61	IP67	45°
6W	85	75	61	IP67	45°
9W	110	85	65	IP67	45°
12W	110	85	65	IP67	45°

Available CCT



INGROUND LINEAR WALL WASHER



Type	Power	Length	Width	Depth	IP	Beam angle
Inground	3W	103	45	70	IP68	15°/30°
Inground	6W	170	45	70	IP68	15°/30°
Inground	11W	300	45	70	IP68	15°/30°
Inground	22W	600	45	70	IP68	15°/30°
Inground	33W	900	45	70	IP68	15°/30°
Inground	44W	1200	45	70	IP68	15°/30°

Available CCT



*Dimensions in mm



LED Powered By

CREE | **bridgelux**

Driver Powered By

PHILIPS | **FULHAM** or **EQUIVALENT**

Under Water Lights

Discover the
Magic underwater.



UNDERWATER RECESSED



Power	Outer	Cutout	Depth	Voltage	IP	Beam angle
1W	100	75	23	12V DC	IP68	30°/45°/60°
3W	100	75	23	12V DC	IP68	30°/45°/60°
6W	100	75	23	12V DC	IP68	30°/45°/60°
9W	140	110	23	12V DC	IP68	30°/45°/60°
12W	140	110	23	12V DC	IP68	30°/45°/60°

(Fixture material - Aluminium/Stainless steel 304)



UNDERWATER SURFACE FLAT



Power	Outer	Height	Voltage	IP	Beam angle
3W	75	23	12V DC	IP68	30°/45°/60°
6W	75	23	12V DC	IP68	30°/45°/60°
9W	110	23	12V DC	IP68	30°/45°/60°
12W	110	23	12V DC	IP68	30°/45°/60°

(Fixture material - Aluminium/Stainless steel 304)



UNDERWATER SURFACE LIGHT WITH CLAMP



Power	Outer	Height	Voltage	IP	Beam angle
3W	75	23	12V DC	IP68	30°/45°/60°
6W	75	23	12V DC	IP68	30°/45°/60°
9W	110	23	12V DC	IP68	30°/45°/60°
12W	110	23	12V DC	IP68	30°/45°/60°

(Fixture material - Aluminium/Stainless steel 304)



UNDERWATER FOUNTAIN



Power	Outer	Nozzle Dia	Height	Voltage	IP	Beam angle
6W	125	30	30	12V DC	IP68	15°/30°
9W	150	50	30	12V DC	IP68	15°/30°

(Fixture material - Aluminium/Stainless steel 304)




*Dimensions in mm



LED Powered By

CREE | **OSRAM**

Light up
the darkness.

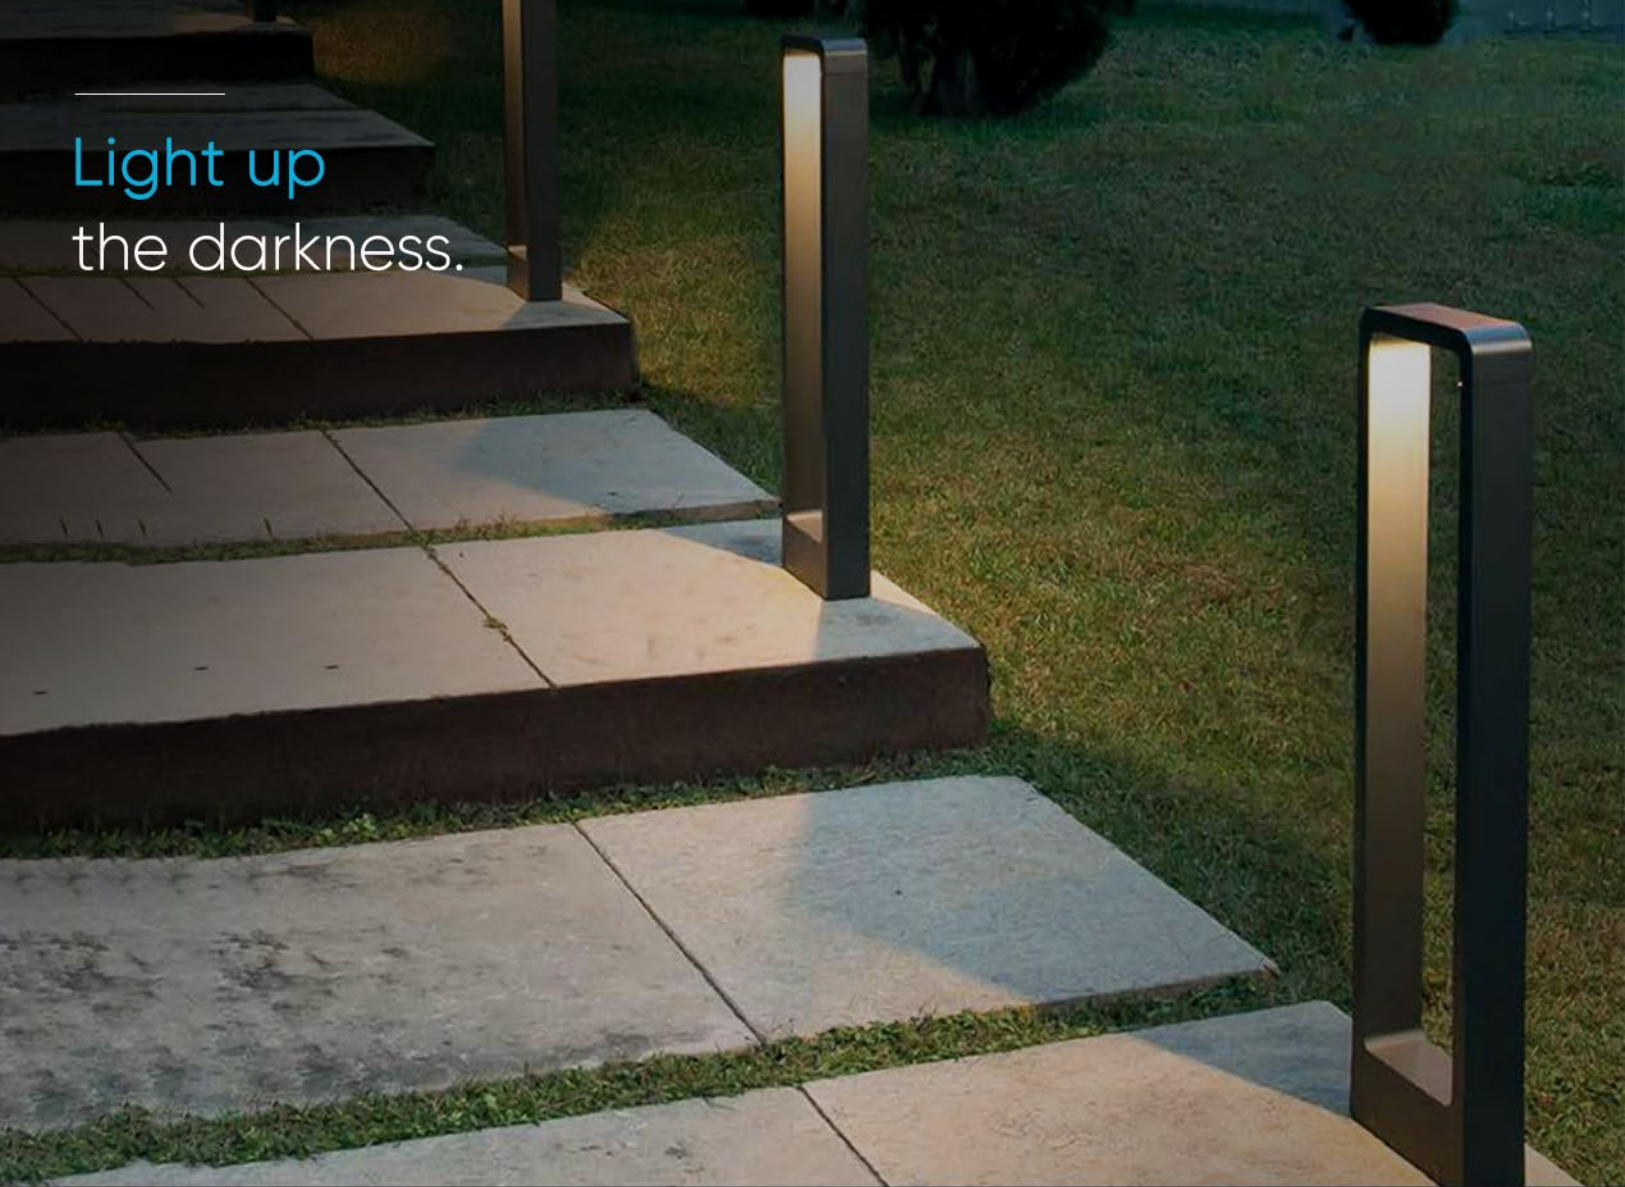

Bollards & Gate Lights



IP66 BOLLARDS



CLASSIC ROUND BOLLARD

Type	Fixture size
E 27	220X300(H)
E 27	220X650(H)
E 27	220X800(H)



CLASSIC SQUARE BOLLARD

Type	Fixture size
E 27	220X220X300(H)
E 27	220X220X650(H)
E 27	220X220X800(H)



CLASSIC PLUS BOLLARD

Type	Fixture size
E 27	175X300(H)
E 27	175X650(H)
E 27	175X800(H)



TRIANGULAR BOLLARD

Type	Fixture size
E 27	128X300(H)
E 27	128X500(H)
E 27	128X800(H)



WONDER BOLLARD

Type	Fixture size
E 27	85X85X300(H)
E 27	85X85X500(H)
E 27	85X85X800(H)



ELEGANT BOLLARD

Power	Fixture size
10W	108X300(H)
10W	108X650(H)
10W	108X750(H)



FLORA BOLLARD

Power	Fixture size
10W	250X300(H)
10W	250X600(H)
10W	250X900(H)



FLATO BOLLARD

Power	Fixture size
10W	200X110X300(H)
10W	200X110X600(H)
10W	200X110X900(H)




MARVELO BOLLARD

Power	Fixture size
20W	160X160X450(H)
20W	160X160X600(H)



*Dimensions in mm



LED Powered By

CREE | **EPISTAR**

IP66 BOLLARDS



FOUR WAY ROUND BOLLARD

Power	Fixture size
12W	108X260(H)
12W	108X600(H)



FOUR WAY SQUARE BOLLARD

Power	Fixture size
12W	109X109X300(H)
12W	109X109X600(H)



RECTANGULAR BOLLARD

Power	Fixture size
12W	160X55X300(H)
12W	160X55X600(H)

IP66 GATE LIGHTS



CLASSIC ROUND GATE LIGHT

Type	Fixture size
E 27	220x210(H)x89(P.D)



CLASSIC SQUARE GATE LIGHT

Type	Fixture size
E 27	220x210(H)x92(P.D)



CLASSIC PLUS GATE LIGHT

Type	Fixture size
E 27	175x220(H)x89(P.D)



GRACE GATE LIGHT

Type	Fixture size
E 27	160X160X176(H)
E 27	220X220X220(H)



GRACE PLUS GATE LIGHT

Type	Fixture size
E 27	150X150X165(H)
E 27	250X250X265(H)



MARVELO GATE LIGHT

Power	Fixture size
20W	160X230(H)X65(P.D)

*Dimensions in mm



LED Powered By

CREE | **EPISTAR**

emergex®



Outdoor Wall Lights & Bulkheads

Your wall of
Creativity.



Outdoor
Wall lights &
Bulkheads



IP66 OUTDOOR WALL LIGHTS


WL 01

Power	Fixture size	Beam angle
3W/5W	80x75x65(H)	60°


WL 02

Power	Fixture size	Beam angle
2X3W/2X5W	80x142x65(H)	60°


WL 03

Power	Fixture size	Beam angle
1X3W	40x90x60(H)	10°


WL 04

Power	Fixture size	Beam angle
2X3W	45x120x63(H)	10°


WL 05

Power	Fixture size	Beam angle
4X1W	90x90x40(H)	60°


WL 06


Power	Fixture size	Beam angle
4X1W	100x100x51(H)	10°


WL 07

Power	Fixture size	Beam angle
2X3W	108x180x65(H)	15°/60°


WL 08

Power	Fixture size	Beam angle
10W	115x90x30(H)	120°


WL 09

Power	Fixture size	Beam angle
16W	175x90x30(H)	120°


WL 10

Power	Fixture size	Beam angle
3X2W	165x45(H)	45°


WL 11

Power	Fixture size	Beam angle
2X1W	65x50x60(H)	60°


WL 12

Power	Fixture size	Beam angle
4X1W	77x77x57(H)	60°

Available CCT



*Dimensions in mm



LED Powered By

CREE | **EPISTAR**

IP66 OUTDOOR WALL LIGHTS



WL 31

Power	Fixture size	Beam angle
2W	76x80x38(H)	60°



WL 32

Power	Fixture size	Beam angle
4W	116x80x38(H)	60°



WL 33

Power	Fixture size	Beam angle
6W	170x80x43(H)	60°



WL 34

Power	Fixture size	Beam angle
8W	220x80x47(H)	60°



WL 35

Power	Fixture size	Beam angle
4W	130x80x35(H)	40°



WL 36

Power	Fixture size	Beam angle
3W	150x75x40(H)	40°



WL 37

Power	Fixture size	Beam angle
5W	65x100x90(H)	60°



WL 38

Power	Fixture size	Beam angle
2X5W	65x130x90(H)	60°



WL 39

Power	Fixture size	Beam angle
12W	74x100x110(H)	60°



WL 40

Power	Fixture size	Beam angle
2X12W	74x180x110(H)	60°



WL 41

Power	Fixture size	Beam angle
2W	40x40x53(H)	45°




WL 42

Power	Fixture size	Beam angle
2x2W	40x40x53(H)	45°

Available CCT



*Dimensions in mm



LED Powered By
CREE | **EPSTAR**

IP66 OUTDOOR WALL LIGHTS


WL 61

Power	Fixture size	Beam angle
6W	162x86x100	60°


WL 62

Power	Fixture size	Beam angle
15W	128x88x175	80°


WL 63

Power	Fixture size	Beam angle
6W	240x120x55	130°


WL 64

Power	Fixture size	Beam angle
10W	230x72x60	80°


WL 65

Power	Fixture size	Beam angle
6W	232x80x80	160°


WL 66

Power	Fixture size	Beam angle
10W	150x50	360°


WL 67

Power	Fixture size	Beam angle
10W	150x150x50	360°


WL 68


Power	Fixture size	Beam angle
9W	130x38	240°


WL 69

Power	Fixture size	Beam angle
9W	130x130x38	240°


WL 70

Power	Fixture size	Beam angle
8W	115x106x28	120°


WL 71

Power	Fixture size	Beam angle
12W	175x106x28	120°


WL 72

Power	Fixture size	Beam angle
7W	118X165(H)	20°

*Dimensions in mm



Available CCT



LED Powered By

CREE | **EPISTAR**

IP66 OUTDOOR WALL LIGHTS



**CLASSIC ROUND
WALL LIGHT**

Type	Fixture size
E27	220x210x89



**CLASSIC SQUARE
WALL LIGHT**

Type	Fixture size
E27	220x210x92



**CLASSIC PLUS
WALL LIGHT**

Type	Fixture size
E27	175x220x89



**ELEGANT
WALL LIGHT**

Power	Fixture size
10W	108x280(H)

IP66 OUTDOOR BULKHEADS



BRIGHTO BULKHEAD

Power	Fixture size	Beam angle
5W	117x71X60	160°
10W	212x82X65	160°



CEILING BULKHEAD

Power	Fixture size	Beam angle
6W	125x50X95	160°
10W	175x50X95	160°



GLITZ BULKHEAD

Power	Fixture size	Beam angle
10W	166x76X62	160°
18W	200x100X68	160°



OUTDOOR SURFACE

Power	Fixture size	Beam angle
10W	150X55	120°
15W	200X55	120°

*Dimensions in mm



Available CCT



LED Powered By

CREE | **EPSTAR**

Post Top Light

Lighting
Your Landscape
Brighter.



POST TOP LIGHT



PT - 100

Power 36W/50W
Size 500x425x75mm
IP66



PT - 150

Power 36W/50W
Size 500x425x75mm
IP66



PT - 200

Power 50W
Size 450x450x65mm
IP66



PT - 250

Power 33W
Size 535x745mm
IP66



PT - 300

Power 50W
Size 440x440mm
IP66



PT - 350

Power 36W/50W
Size 400x300x60mm
IP66



PT - 400

Power 36W/50W
Size 475x100x60mm
IP66



PT - 450

Power 50W
Size 560x320x65mm
IP66



PT - 500

Power 100W
Size 560x65mm
IP66



*Dimensions in mm



LED Powered By


OSRAM | *bridgelux*

Step Light



Lift up

Your Brightness.

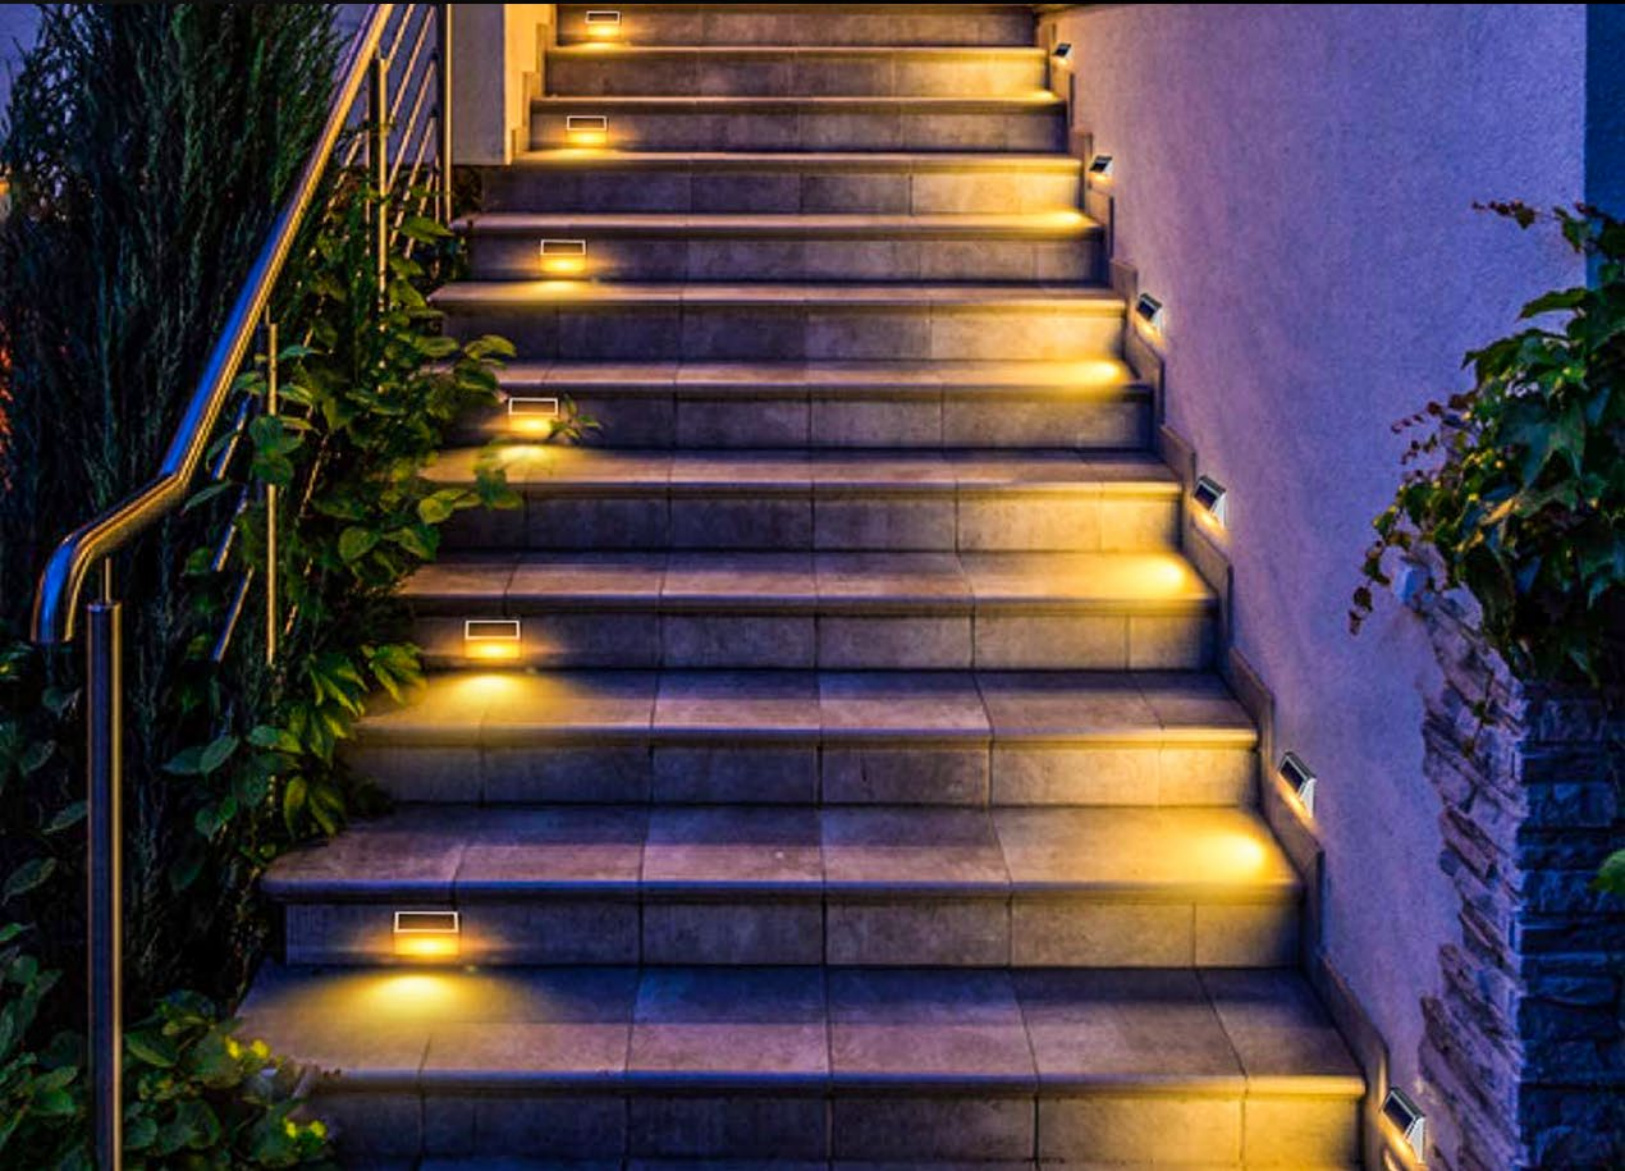

OUTDOOR STEP LIGHT - RECESSED


NFT 11

Power	Outer	Cutout	Beam angle
5W	145X70X40	110X55	120°


NFT 12

Power	Outer	Cutout	Beam angle
5W	165X95X70	130X80	120°


NFT 13

Power	Outer	Cutout	Beam angle
5W	90X70(H)	78	45°


NFT 14

Power	Outer	Cutout	Beam angle
5W	90X70(H)	78	45°


NFT 15

Power	Outer	Cutout	Beam angle
3W	100X57X50	98X50	10°


NFT 16

Power	Outer	Cutout	Beam angle
6W	210X58X50	200X55	10°


NFT 17

Power	Outer	Cutout	Beam angle
2W	114X114X60	110x110	30°


NFT 18

Power	Outer	Cutout	Beam angle
4W	170X114X60	165x110	30°


NFT 19

Power	Outer	Cutout	Beam angle
6W	226X114X60	220x110	30°


NFT 20

Power	Outer	Cutout	Beam angle
5W	95X95X40	80X80	100°


NFT 21

Power	Outer	Cutout	Beam angle
5W	115X85X50	110x70	100°


NFT 22

Power	Outer	Cutout	Beam angle
3W	59X75(H)	39	360°

*Dimensions in mm



Available CCT



LED Powered By

CREE | **bridgelux**

OUTDOOR STEP LIGHT - SURFACE



NFT 51

Power	Outer	Beam angle
3W	90X60X40	110°



NFT 52

Power	Outer	Beam angle
6W	150X70X40	110°



NFT 53

Power	Outer	Beam angle
3W	122X122X26	80°



NFT 54

Power	Outer	Beam angle
3W	148X26	80°



NFT 55

Power	Outer	Beam angle
3W	228X80X30	120°



NFT 56

Power	Outer	Beam angle
5W	228X80X30	120°

INDOOR STEP LIGHT - RECESSED



NFT 71

Power	Outer	Cutout	Beam angle
3W	50X60(H)	45	30°



NFT 72

Power	Outer	Cutout	Beam angle
3W	50X50(H)	45	30°



NFT 73

Power	Outer	Cutout	Beam angle
3W	83X40(H)	75X75	90°



NFT 74

Power	Outer	Cutout	Beam angle
3W	60X60(H)	50	30°



NFT 75

Power	Outer	Cutout	Beam angle
3W	60X60(H)	50	30°

*Dimensions in mm



Available CCT



LED Powered By

CREE | **bridgelux**

Street Lights

Lighting
Your way.



VIEWX LENS STREET LIGHT



Power	Length	Width	Pipe dia	IP	Beam angle
18W/24W	290	110	40	IP66	120°
30W/36W	315	128	40	IP66	120°
50W/70W	380	165	45	IP66	120°
100W	450	190	52	IP66	120°
150W	575	205	70	IP66	120°

Available CCT



INSTA STREET LIGHT



- Available with White glass & White PC reflector too

Power	Length	Width	Pipe dia	IP	Beam angle
15W	270	85	38	IP66	120°
20W	305	95	38	IP66	120°
24W	345	135	45	IP66	120°
36W	370	140	45	IP66	120°
50W/60W	385	155	45	IP66	120°

Available CCT



INSTA PLUS STREET LIGHT



Power	Length	Width	Pipe dia	IP	Beam angle
36W	375	147	45	IP66	120°
50W	375	147	45	IP66	120°
75W	435	200	50	IP66	120°
100W	435	200	50	IP66	120°
120W	535	263	50	IP66	120°
150W	535	263	58	IP66	120°
200W	610	335	58	IP66	120°

Available CCT



AIO SOLAR STREET LIGHT




Power	Length	Width	Charging time	Battery
30W	300	210	7-8 Hrs	3.2V 5A LiFePo4
60W	395	210	7-8 Hrs	3.2V 10A LiFePo4
90W	500	235	7-8 Hrs	3.2V 15A LiFePo4
120W	635	255	7-8 Hrs	3.2V 20A LiFePo4

Available CCT



*Dimensions in mm



LED Powered By

bridgelux | OSRAM | EPISTAR

Better Light
Better Performance.



Flood
Lights



NINJA FLOOD LIGHT



Power	Length	Width	Height	IP	Beam angle
50W	200	220	60	IP66	120°
100W	240	260	60	IP66	120°
150W	255	305	65	IP66	120°
200W	290	365	70	IP66	120°

Available CCT



RUDY FLOOD LIGHT



Power	Length	Width	Height	IP	Beam angle
20W	165	160	45	IP66	120°
30W	200	180	60	IP66	120°
50W	215	205	60	IP66	120°
100W	270	245	70	IP66	120°
150W	305	285	70	IP66	120°
200W	345	325	80	IP66	120°
250W/300W	415	370	80	IP66	120°
400W	415	370	80	IP66	120°

Available CCT



OPTO LENS FLOOD LIGHT



Power	Length	Width	Height	IP	Beam angle
30W	200	180	40	IP66	120°
50W	220	180	40	IP66	120°
100W	225	285	40	IP66	120°
150W	305	285	70	IP66	120°
200W	345	325	80	IP66	120°

Available CCT



CANOPY LIGHT



Power	Length	Width	Height	IP	Beam angle
60W	375	375	66	IP66	120°
80W	375	375	66	IP66	120°

Available CCT



- Bottom opening exclusively used for Petrol bunks & Gas stations

*Dimensions in mm




LED Powered By

OSRAM | bridgelux.

Industrial **Highbay & Wellglass**

Crisp &
Bright.

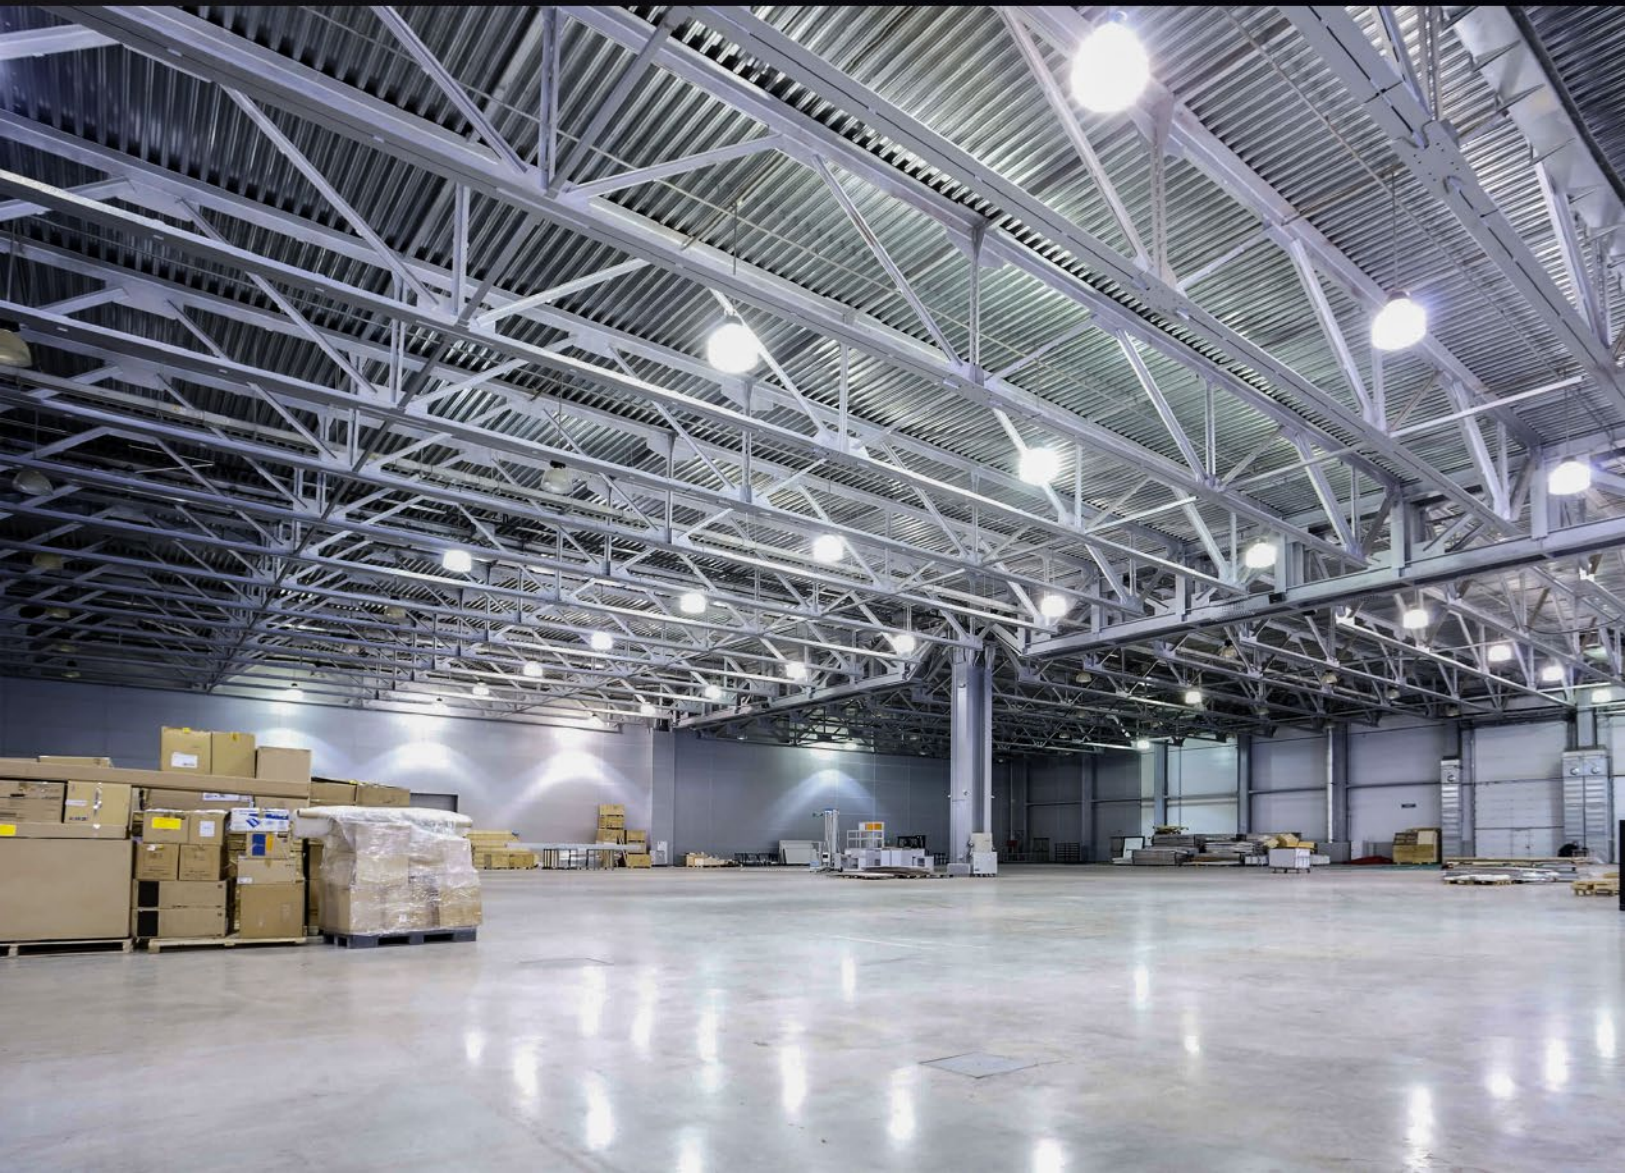

SECURO UFO HIGHBAY



- Available with PC Lens cover, Toughened glass and Aluminium reflector

Power	Dia	Height	IP	Beam angle
50W	185	50	IP66	120°
100W	230	60	IP66	120°
150W	320	70	IP66	120°
200W	320	70	IP66	120°
250W	370	85	IP66	120°
300W	370	85	IP66	120°

Available CCT



SECURO WELLGLASS




- Available with Milky PC Dome, Clear PC Dome and Toughened glass

Power	Dia	Height	IP	Beam angle
35W	150	140	IP66	120°
45W	180	170	IP66	120°
60W	180	170	IP66	120°
80W	210	200	IP66	120°

Available CCT



*Dimensions in mm



LED Powered By

OSRAM | **bridgelux**

The logo for Emergex, featuring the word "emergex" in a bold, blue, sans-serif font. A registered trademark symbol (®) is located at the top right of the letter "x".



Light. Energy. Life

Corporate Office

EMERGEX LLP TC : 55/2699, HSRA E-47,
Thaliyal-Kalady Road, Opp. Excise Circle Office,
Karamana, Trivandrum, Kerala - 695002

Manufacturing Unit

EMERGEX LLP Emergex LLP No.27, Kulumikkarai
Road, Periyar Nagar, Trichy, Tamil Nadu - 620008



www.emergex.co.in